


#### Features

- ★ One Leak Path
  - Metal to Metal C-Ring
  - Triple O-Ring 200°C Option
- ★ Modular Memory Cartridge
- ★ 2 Million Sample Capacity
- ★ Inconel 718 / MP35N – NACE MR0175
- ★ Fast Response

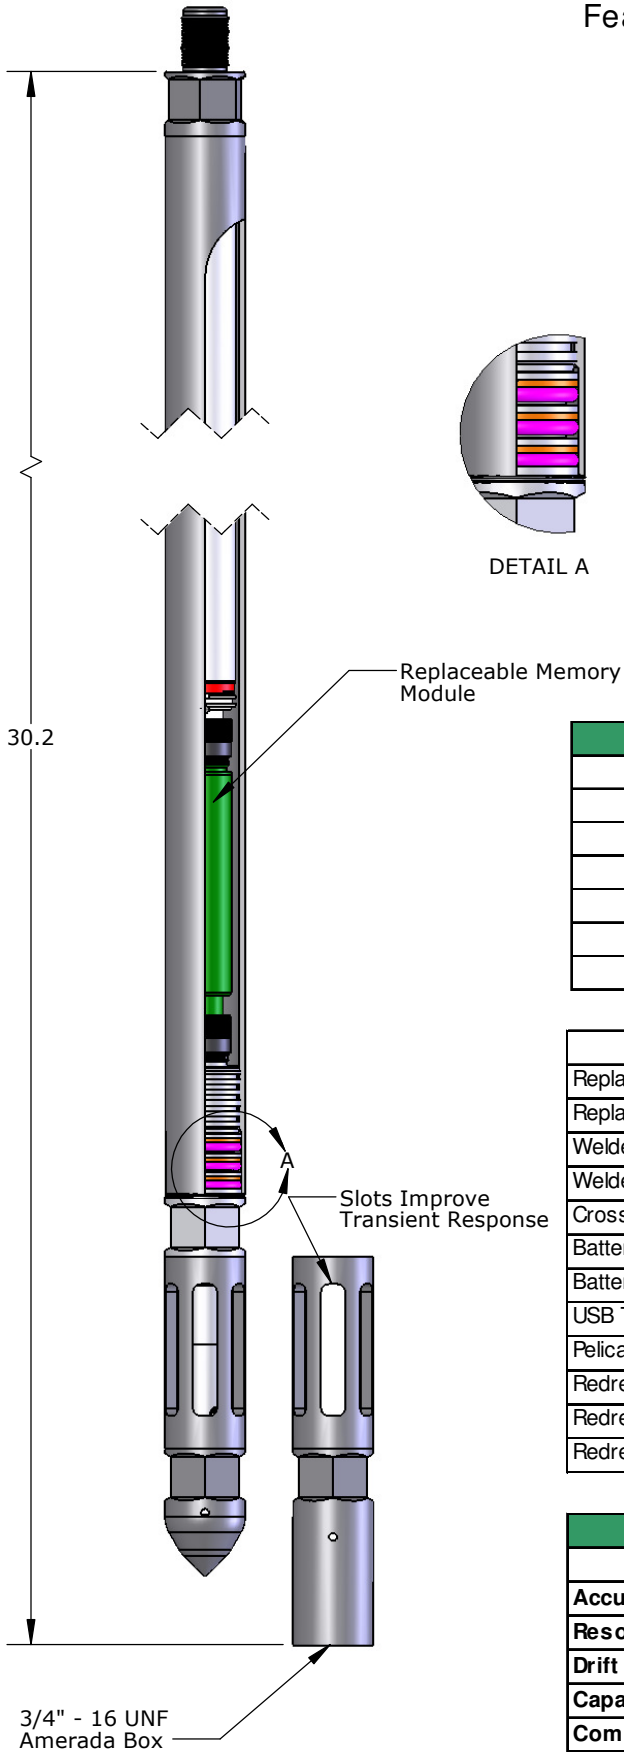

1.25" OD Quartz DXB 2 Memory Tool - Inconel 718		
Pressure	Temperature	Part No.
10,000 psi	150°C	100017
16,000 psi	150°C	101695
16,000 psi	177°C	101696
16,000 psi	200°C	101697
20,000 psi	177°C	101698
20,000 psi	200°C	101699

Accessory Type	Part No.
Replaceable Memory Module 177°C	100024
Replaceable Memory Module 200°C	100765
Welded Bullnose Inconel 718	102321
Welded Crossover 0.75-16 Inconel 718	102323
Crossover 0.25 NPT Inconel 718	100130
Battery Barrel 2 X 'CC' Inconel 718	102779
Battery Barrel 3 X 'CC' Inconel 718	100022
USB To Serial Converter Assembly	100682
Pelican Case Assembly	101686
Redress Kit Viton 90	101693
Redress Kit Aflas	101694
Redress Kit Chemraz	101685

Specifications		
	Pressure	Temperature
<b>Accuracy</b>	0.020% F.S.	0.25°C
<b>Resolution</b>	0.00006% F.S.	0.005°C
<b>Drift</b>	< 3 psi / year	< 0.1°C / year
<b>Capacity</b>	2 Million Samples	
<b>Communication Method</b>	USB	